

# INSTALLATION INSTRUCTION FOR FIXTURE#1621-613

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

### ASSEMBLY THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. Remove the old fixture from ceiling, including the old cross bar.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to lose any small parts necessary for installation.
3. Assemble the extension rod (G) together using the nipple (F) as needed until desired height is reached. Thread wire through down rods as needed.
4. Thread the bottom end of extension rod (G) onto the nipple (H) tightly, then put the ring (N) onto the top end of the extension rod (G) and secure by threading the loop (E) on. (Remark: there is one piece 11" L. chain included in the hardware bag. You could add the chain on to increase the fixture height if needed)
5. Put the glass shade (J), spacer ring (L) over the socket (I) and secure with socket ring (K) using the socket ring tool (M).
6. Install the bulbs in accordance with the fixture's specifications. DO NOT EXCEED THE MAXIMUM WATTAGE RATING!


### MOUNTING THE FIXTURE

7. Attach the mounting plate (B) to the outlet box using the outlet box screws (A). The side of the mounting bar marked "GND" must face out.
8. Follow the wiring instructions carefully (See Fig.2).
9. Attach the fixture main body onto the mounting plate (B) by attaching the ceiling canopy (D) onto the mounting plate (B) using the mounting screw (C).

### Wiring (See fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black (HOT) house wire. Connect the white wire from the fixture to the white (Neutral) house wire. Make sure all the wire nuts were secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (Green or Bare Copper) connect fixture's ground wire to it. Other wise attach the bare copper fixture wire to the green ground screw on the mounting bar.
2. Tuck the wire connections neatly into the ceiling junction box. Your installation is now complete. Turn on the power supply of the junction box to test the fixture.

**Fig.1**

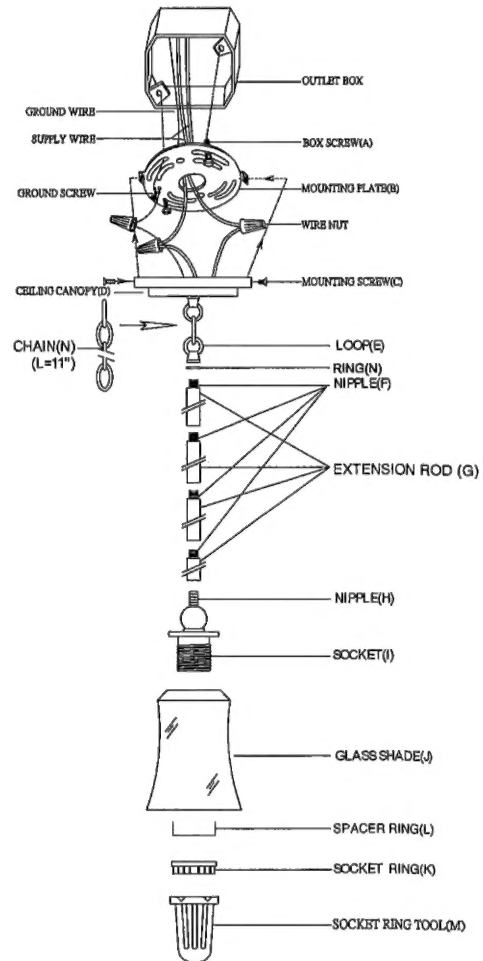

**Fig.2**

FIXTURE WIRES	FIXTURE WIRES	FIXTURE WIRES
Black or Smooth	White or Ribbed	Bare Copper (Ground)
HOUSE WIRES Black (Hot)	HOUSE WIRES White (Neutral)	HOUSE WIRES Green (Ground)



american  
lighting  
association



Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.